

Construction Project Update September 23, 2021


2021 Roadway Improvements

This chart and following pages represent the streets that are included as part of the City of Sycamore's locally funded street program. These projects include concrete improvements and microsurfacing.

Microsurfacing

Street	Construction Status	Limits	Scope of Work
Reston Ponds (Concrete Work)	Construction Crews have completed work.		
Reston Ponds and Johnson Avenue (Microsurfacing)	<p>Microsurface to start Monday September 27th, weather Dependent.</p> <p>Days 1&2</p> <ul style="list-style-type: none"> • Thurow St • Reston Blvd • Chautauqua Ln <p>Days 3&4</p> <ul style="list-style-type: none"> • Leah Ct • MacAllister Ct • Reston Ct • Ohio Grove <p>Days 5&6</p> <ul style="list-style-type: none"> • Wild St • Fulton Ln • Bailey Rd <p>Days 7&8</p> <ul style="list-style-type: none"> • Brower Pl 	See attached Map	<p>Microsurfacing of existing city streets. This is a preventative maintenance procedure that provides a new wearing surface to extended the pavement life. It has previously been used on Prairie Drive and within the Fox Pointe and Maple Terrace Subdivisions.</p> <p>Individual notices will be placed on doors and road construction/no parking signs will be posted. Portions of the roadway will temporarily be blocked</p> <p>Trash collection will be completed in the morning during construction.</p> <p>Microsurface may appear to have a rough finish at first but will continue to be smoothed by traffic.</p>

Reston Ponds Sidewalk Ramp and Microsurface Locations

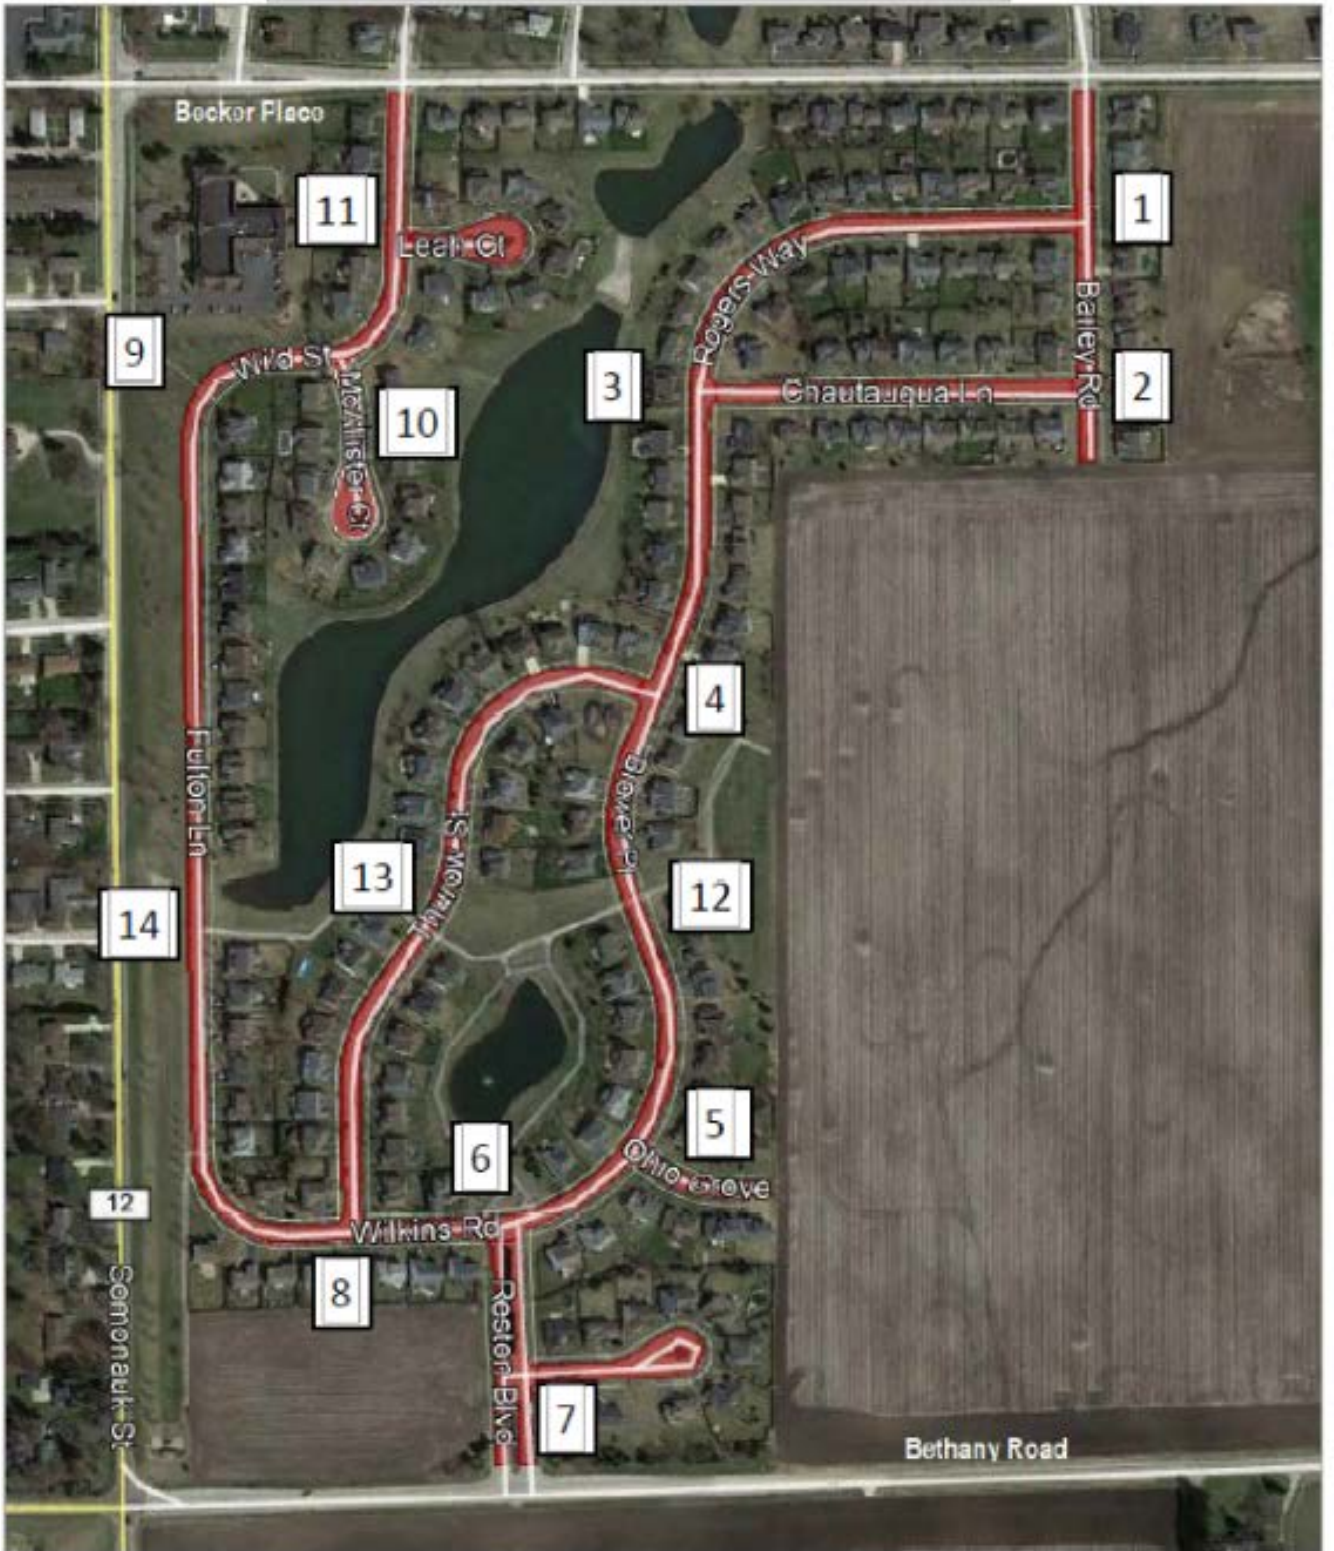

Motor Fuel Tax

The program will also be partially funded by motor fuel tax funds and local sales tax. These funds will be used to complete the repair of portions of the following streets:

Street	Limits	Description of Work	Status
Plaza Drive	DeKalb Avenue to End of cul-de-sac	<ul style="list-style-type: none"> • Surface removal/overlay • Spot curb and sidewalk removal/replacement 	Roadway milling will be completed this week within paving scheduled for the week of September 27 th .
Cloverlane Drive	Fairway Lane to South (135')		
Pebblewood Court	Russet Lane to End of cul-de-sac		
Crosby Avenue	Fair Street to West End (Curbed Section)	<ul style="list-style-type: none"> • Surface removal/overlay • Base Repair • Spot curb and sidewalk removal/replacement 	Roadwork is completed.
North Cross Street (South Section)	Box Culvert to Loomis Street	<ul style="list-style-type: none"> • Surface removal/overlay • Base Repair/ Reconstruction as needed • Curb and Spot Sidewalk removal/replacement 	
North Cross Street (North Section)	Box Culvert to North End	<ul style="list-style-type: none"> • Surface removal/overlay • Base Repair/ Reconstruction as needed • Storm Sewer Improvements • Curb and Spot Sidewalk 	

Pavement Rejuvenator- Completed

The following streets were treated with pavement rejuvenator. Work is complete.

Rejuvenator is a product placed on newer streets that replaces components lost to oxidation. It extends the useful life of the pavement by helping to reseal the asphalt.

Street	
Loomis Street	Elmwood Street
Mason Court	West Street
Meadow Lane	Albert Avenue
Edward Street	Esther Avenue
West Sycamore Street	South Cross Street
Charles Street	Ellen Street
Center Avenue	Stark Avenue
Waterman Street	Brickville Road
Park Avenue	Somonauk St.
Chauncey Street	

Cracksealing

This preventative maintenance program will start in September and includes multiple City Streets. Notification will be provided via signs posted in the parkway.

Cracksealing involves placing a rubberized adhesive into the pavement cracks to prevent moisture from entering. This flexible material sometimes expands with changes in temperatures and can wear off during warmer weather.

